



WEVER & DUCRÉ  
LIGHTING

# PIRRO SURFACE 6.0

151651K3

Project
Type
Notes
Quantity
Date

## GENERAL

Ceiling  
 Surface  
 Jet Black + Gold  
 IP20  
 Interior  
 2280 lm  
 9005<sup>a</sup>

## LED

2700 K  
 3-step binning



## PHYSICAL

Length 270 mm  
 Width 50 mm  
 Height 80 mm  
 0.8 kg

## ELECTRICAL

incl. PS | phase-cut dim  
 220 - 240 V  
 Total connected power 27 W  
 PC1  
 Safety distance 0.3 m

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.

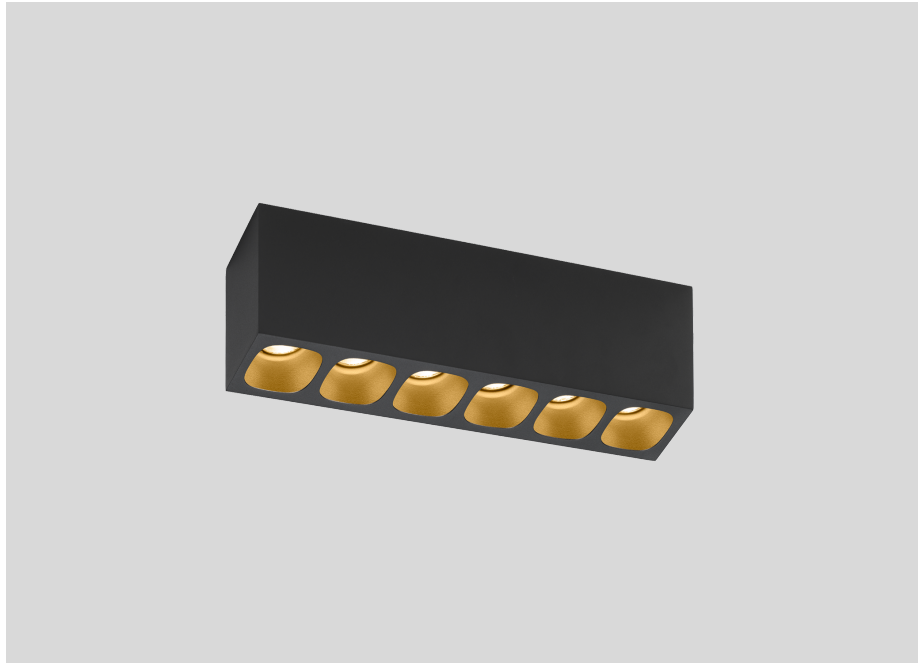



**WEVER & DUCRÉ**  
LIGHTING

# PIRRO SURFACE 6.0

151651K3

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.92	0.88	0.83	0.79	0.76
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## OPTICAL

### Honeycomb

TYPE	COLOUR	(MM)	ORDERCODE
CENO   PIRRO   BLIEK PETIT	Pure White	29	9 0 0 5 1 1 3 0
CENO   PIRRO   BLIEK PETIT	Signal Black	29	9 0 0 5 1 1 3 1

