



WEVER & DUCRÉ
LIGHTING

PIRRO 1.0

150151K5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

Jet Black + Gold

IP20

Interior

420 lm

9005^a

LED

3000 K

CRI 90

L70 / 50000 h

3-step binning

OPTICAL

Flood

Beam angle 32°

PHYSICAL

Length 56 mm

Width 56 mm

Height 43 mm

0.09 kg

ELECTRICAL

excl. power supply

9 V

Total connected power 4 W

500 mA

PC3

Safety distance 0.3 m

CUTOUT

Length 50 mm




Width 50 mm

Min. ceiling thickness 4 mm


Max. ceiling thickness 25 mm

Recessed depth 85 mm

^a RAL Palette colors may deviate slightly due to production conditions.

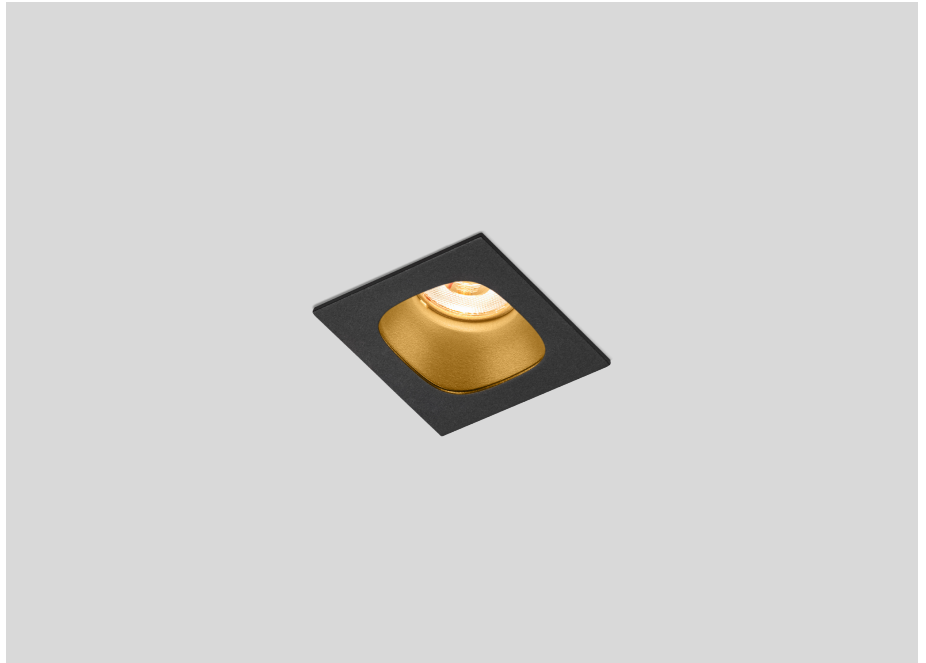

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

PIRRO 1.0

150151K5

CONE DIAGRAM

32°

h (m)	E0° (lx)	ø (m)
1	1120	0.57
2	280	1.15
3	124	1.72
4	70	2.30
5	44	2.87

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.92	0.88	0.83	0.79	0.76
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRONICAL

Power Supply 500mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
7W dim	122·41·23		9 0 2 2 4 3 0 1
10W 2.5-20V DALI 1-100%	124·31·21	2.5 - 20V	9 0 2 4 4 4 0 1

OPTICAL

Honeycomb

TYPE	COLOUR	(MM)	ORDERCODE
CENO PIRRO BLIEK PETIT	Pure White	29	9 0 0 5 1 1 3 0
CENO PIRRO BLIEK PETIT	Signal Black	29	9 0 0 5 1 1 3 1



ø29