

## **Technical specification**

Create a graphic wall decoration with Stick, Which slender lines naturally slides underneath Each other for a creative setting, showing the beauty of indirect light.


# **Technical data**

Material Aluminum

Colour White, Black, Gold

**Light Source** Voltage 230-240 V Electronic Control gear 3000K

Color temperature CRI (Ra) 80>

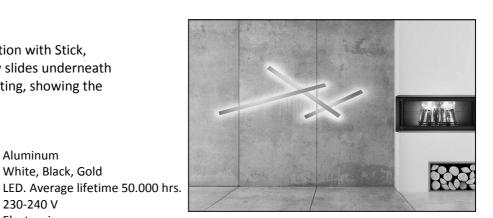

#### NOTE:

5 years warranty on LED light source.

Can be connected to mains (electricity) from both bases

\*Gold colour recommended for indoor use only.

STICK 120	commended for mac	WALL AND CERLIN	INDIRECT LIGHT  INDIRECT LIGHT  INDOOR  LED	ECO IP 54	650° F CE
CODE	MEASURE mm	LIGHT SOURCE		MOUNTING	\$4mm
256500 White	L1200XW50XD44	LED 25W		Wall/ceiling	
256501 Black	L1200XW50XD44	LED 25W		Wall/ceiling	a stoomin
256503 Gold*	L1200XW50XD44	LED 25W		Wall/ceiling	thum thum thum the th
					mm08 mm08

## **STICK 150**

• • • • • • • •				
CODE	MEASURE mm	LIGHT SOURCE	MOUNTING	· One
256504 White	L1500XW50XD60	LED 30W	Wall/ceiling	100
256505 Black	L1500XW50XD60	LED 30W	Wall/ceiling	0 Econes
256507 Gold*	L1500XW50XD60	LED 30W	Wall/ceiling	# 31 <u>F</u>
				414

## **STICK 180**

MEASURE mm	LIGHT SOURCE		MOUNTING	Porton .
L1800XW50XD76	LED 36W		Wall/ceiling	ones (S
L1800XW50XD76	LED 36W		Wall/ceiling	0)188
L1800XW50XD76	LED 36W		Wall/ceiling	. Ju
				Manual Atlanta
	L1800XW50XD76 L1800XW50XD76	L1800XW50XD76 LED 36W L1800XW50XD76 LED 36W	L1800XW50XD76 LED 36W L1800XW50XD76 LED 36W	L1800XW50XD76         LED 36W         Wall/ceiling           L1800XW50XD76         LED 36W         Wall/ceiling           L1800XW50XD76         LED 36W         Wall/ceiling

