



WEVER & DUCRÉ
LIGHTING

DEEP bijou 1.0

165161W5

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling
 Recessed
 Signal White
 IP20
 Interior
 350 lm
 9003^a

LED

3000 K
 CRI 90
 L80 / 50000 h
 3-step binning

OPTICAL

Flood
 Beam angle 30°

PHYSICAL

Diameter 56 mm
 Height 50 mm
 0.065 kg



ELECTRICAL

excl. power supply
 18 V
 Total connected power 6 W
 LED Inset 4.5 W
 250 mA
 PC3
 Safety distance 0.3 m


CUTOUT

Diameter 50-52 mm
 Min. ceiling thickness 4 mm
 Max. ceiling thickness 25 mm
 Recessed depth 85 mm

^a RAL Palette colors may deviate slightly due to production conditions.

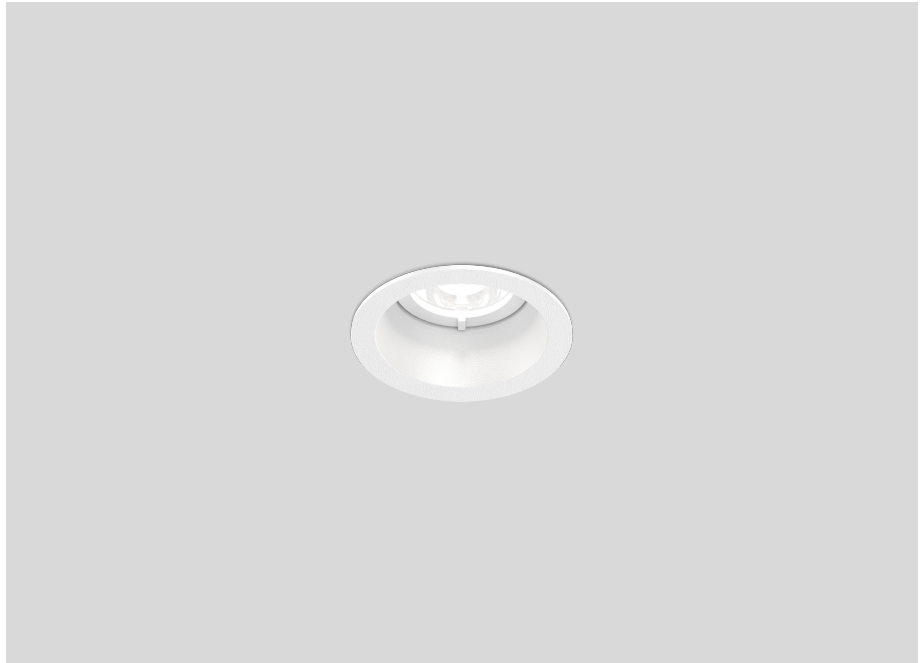

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DEEP bijou 1.0

165161W5

CONE DIAGRAM

flood 30°

h (m)	EO° (lx)	ø (m)
1	1010	0.54
2	254	1.07
3	113	1.61
4	63	2.15
5	40	2.68

Electrical

Power Supply 250mA

TYPE	L · W · H (MM)	ORDERCODE
10W 16-29V phase-cut dim	122·41·23	9 0 2 2 6 4 0 1