



WEVER & DUCRÉ
LIGHTING

DEEP bijou 2.0

165261W3

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

Signal White

IP20

Interior

660 lm

9003^a

LED

2700 K

CRI 90

L80 / 50000 h

3-step binning

OPTICAL

Flood

Beam angle 30°

PHYSICAL

Length 107 mm

Width 56 mm

Height 50 mm

0.15 kg

ELECTRICAL

excl. power supply

36 V

Total connected power 12 W

LED Inset 9 W

250 mA

PC3

Safety distance 0.3 m

CUTOUT

Length 100 mm




Width 50 mm

Min. ceiling thickness 4 mm


Max. ceiling thickness 25 mm

Recessed depth 60 mm

^a RAL Palette colors may deviate slightly due to production conditions.

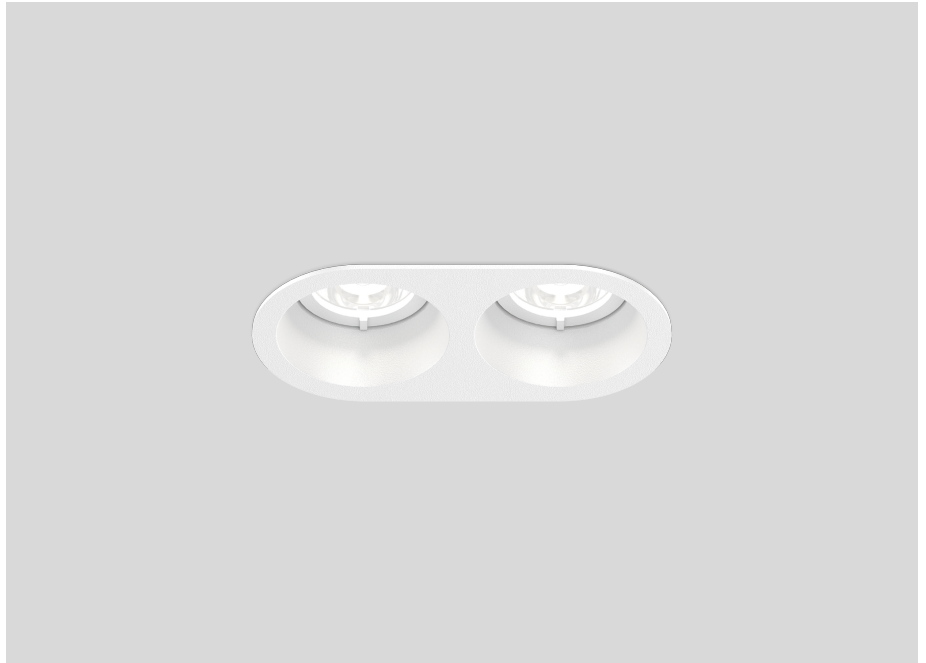

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DEEP bijou 2.0

165261W3

CONE DIAGRAM

flood 30°

h (m)	EO° (lx)	ø (m)
1	1920	0.54
2	481	1.07
3	214	1.61
4	120	2.15
5	77	2.68

Electrical

Power Supply 250mA

TYPE	L · W · H (MM)	ORDERCODE
15W 26-42V phase-cut dim	122·41·23	9 0 2 2 6 5 0 1