



**WEVER & DUCRÉ**  
LIGHTING

# RINI

## SNEAK 1.0 LED

154261W5

Project	.....
Type	.....
Notes	.....
Quantity	.....
Date	.....

### GENERAL

Ceiling	.....
Recessed	.....
Signal White	.....
IP44	.....
Interior	.....
505 <sup>a</sup> to 675 <sup>b</sup> lm	.....
9003 <sup>c</sup>	.....

### LED

3000 K	.....
CRI 90	.....
L80 / 50000 h	.....
3-step binning	.....

### OPTICAL

Flood	.....
Beam angle 35°	.....

### PHYSICAL

Diameter 84 mm	.....
Height 65 mm	.....
0.18 kg	.....

### ELECTRICAL

excl. power supply	.....
18 V	.....
Total connected power 7.9 <sup>a</sup> to 12 <sup>b</sup> W	.....
LED Inset 5.9 <sup>a</sup> to 8.7 <sup>b</sup> W	.....
350 <sup>a</sup> to 500 <sup>b</sup> mA	.....
PC3	.....
Safety distance 0.3 m	.....



### CUTOUT

Diameter 76-79 mm	.....
Min. ceiling thickness 4 mm	.....
Max. ceiling thickness 25 mm	.....
Recessed depth 46 mm	.....


<sup>a</sup> 350mA

<sup>b</sup> 500mA

<sup>c</sup> RAL Palette colors may deviate slightly due to production conditions.



### LIGHT DISTRIBUTION

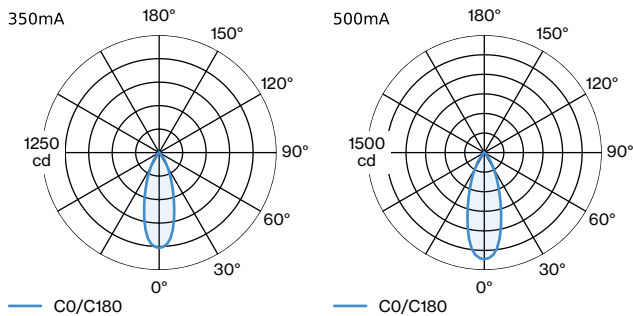



**WEVER & DUCRÉ**  
LIGHTING

# RINI

## SNEAK 1.0 LED

154261W5

### CONE DIAGRAM

flood 36° 350mA			flood 36° 500mA		
h (m)	EO° (lx)	ø (m)	h (m)	EO° (lx)	ø (m)
1	1010	0.64	1	1360	0.64
2	254	1.29	2	341	1.29
3	113	1.93	3	151	1.93
4	63	2.57	4	85	2.57
5	40	3.22	5	54	3.22

### ELECTRICAL

#### Power Supply 500mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W   11-20V	101.5-51-29.2	11 - 20V	9 0 2 1 4 4 0 5
15W   13.5-30V   phase-cut dim 5-100%	102-51-30	13.5 - 30V	9 0 2 2 4 5 0 1
10W   10-20V   1-10V dim	100-43-22.5	11 - 20V	9 0 2 3 4 4 0 1
20W   5-40V   DALI 0-100%	111-52-22	5-40V	9 0 2 4 4 6 0 2

#### Power Supply 350mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W   14-28V   1-10V dim	101.5-51-29.5	14 - 28V	9 0 2 2 3 4 0 1
10W   12-28V   phase-cut dim	102-38-21	12 - 28V	9 0 2 2 3 4 0 2