



WEVER & DUCRÉ
LIGHTING

TRAIN OUTDOOR 1.0

719868W5

Project
Type
Notes
Quantity
Date

GENERAL

Wall
 Surface
 Signal White
 IP65
 Exterior
 405 lm
 RAL 9003^a

LED

3000 K
 CRI 90
 L70 / 50000 h
 3-step binning

OPTICAL

Beam angle 38°


PHYSICAL

Length 50 mm
 Width 50 mm
 Height 85 mm
 0.24 kg


ELECTRICAL

phase-cut dim
 220 - 240 V
 Total connected power 5.9 W
 PC1
 Safety distance 0.3 m


^a RAL Palette colors may deviate slightly due to production conditions.

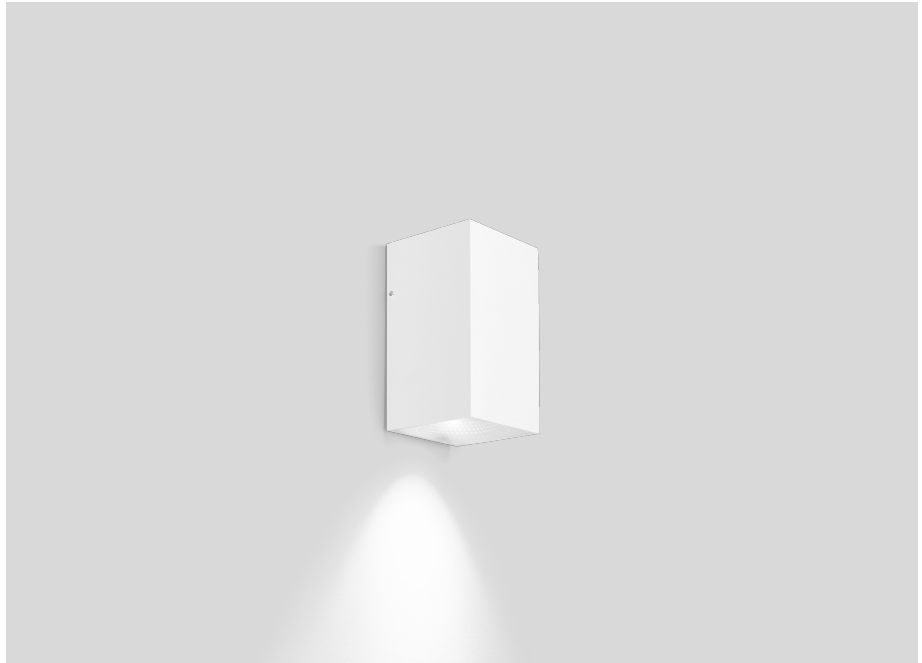

IP65



LIGHT DISTRIBUTION



[719868W5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
 © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

TRAIN OUTDOOR 1.0

719868W5

CONE DIAGRAM

38°

h (m)	E0° (lx)	ø (m)
1	836	0.69
2	209	1.38
3	92	2.06
4	52	2.75
5	33	3.44