





Pla



Milan



Pla 37 T.
 Ø 200 mm | H. 353 mm
 3 x DOB LED 5 W 
 500 (x3) lumens
 2.700 K | CRI 90
 3-step MacAdam | PF. 0,95
 Dimmable
 Class I: Basic insulation

- Finishes**
- 6919  Textured white lacquering
 - 6920  Anthracite grey lacquering

DOWNLOADS

Pla

3D Files

- 6919
- 6920
- 6921
- 6922

3D Max Files

- 6919
- 6920
- 6921
- 6922

Assembly instructions


- 6919
- 6920
- 6921
- 6922


Photometric curve



- 6919
- 6920
- 6921
- 6922

Economic efficiency index

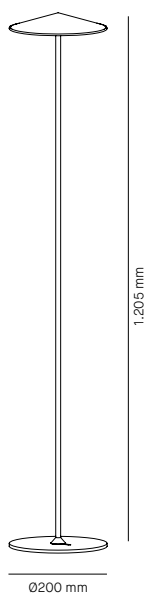- 6919
- 6920
- 6921
- 6922



Pla 37 T.
 Ø 200 mm | H. 1205 mm
 3 x DOB LED 5 W 
 500 (x3) lumens
 2.700 K | CRI 90
 3-step MacAdam | PF. 0,95
 Dimmable
 Class I: Basic insulation

- Finishes**
- 6921  Textured white lacquering
 - 6922  Anthracite grey lacquering

Simplifying complexity

Aluminium injected shade. The internal diffuser is manufactured in injected polycarbonate to cover the whole perimeter, leaving only the three

direct-to-mains LEDs used in this model, visible. Aerial switch included on connection cable. Weight base with 5 mm width.