




Haul



**Milan**




#### HAUL 40 AC CS.

Ø40 mm | H. 64 mm  
1 x DOB LED 5W   
500 lumens | 2.700K  
| CRI 90  
3-step MacAdam  
PF. 0,95  
Dimmable  
Class I: Basic insulation

#### Finishes


- 6799 ● Matt white lacquering (RAL 9016)
- 6800 ● Matt black lacquering (RAL 9005)

#### HAUL 55 AC CS.

Ø55 mm | H. 93 mm  
1 x DOB LED 7W   
665 lumens | 2.700K  
| CRI 90  
3-step MacAdam  
PF. 0,95 | Dimmable

#### Finishes

- 6857 ● Matt white lacquering (RAL 9016)
- 6858 ● Matt black lacquering (RAL 9005)

1 x GU10 Bulb retrofit  
Led 8W Ø50mm   
Code 2123  
| CRI 90  
700 lumens | 2.700K  
Dimmable

#### Finishes

- 6728 ● Matt white lacquering (RAL 9016)
- 6729 ● Matt black lacquering (RAL 9005)

## DOWNLOADS

### Catalogue

[Haul](#)

### 3D Files

[6799/6800](#)  
[6728/6729](#)  
[6857/6858](#)

### 3D Max Files

[6799/6800](#)  
[6728/6729](#)  
[6857/6858](#)

### Assembly instructions

[6799/6800](#)  
[6728/6729](#)  
[6857/6858](#)

### Photometric curve

[6799/6800](#)  
[6728/6729](#)  
[6857/6858](#)

### Economic efficiency index

[6799/6800](#)  
[6728/6729](#)  
[6857/6858](#)



## Haul, the distance of light

### HAUL 40 AC CS.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Injected polycarbonate reflector with high vacuum aluminium finish. Base for fixing to wall or ceiling, injected in zamak. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005).

### HAUL 55 AC CS.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Led "Holder" in polycarbonate injected. Injected polycarbonate reflector, white finishing (MOD. 6857-6858). Base for fixing to wall or ceiling, injected in zamak. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Polycarbonate injected decorative ring. Assembly by pressure. Finishing in white, black and translucent.

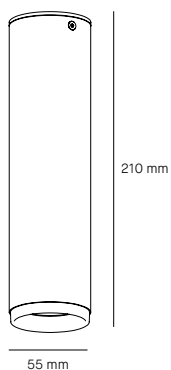

#### HAUL 40 AC CL.

Ø40 mm | H. 153 mm

1 x DOB LED 5W

500 lumens | 2.700K

| CRI 90

3-step MacAdam

PF. 0,95

Dimmable

Class I: Basic insulation

#### Finishes

6789 ● Matt white lacquering (RAL 9016)

6790 ● Matt black lacquering (RAL 9005)

#### HAUL 55 AC CL.

Ø55 mm | H. 210 mm

1 x DOB LED 7W

665 lumens | 2.700K

CRI 90 | 3-step MacAdam

PF. 0,95 | Dimmable

Class I: Basic insulation

#### Finishes

6861 ● Matt white lacquering (RAL 9016)

6862 ● Matt black lacquering (RAL 9005)

1 x GU10 Bulb retrofit

Led 8W Ø50mm

Code 2123

CRI 90 | 700 lumens | 2.700K

Dimable

Clase I: Aislamiento básico

#### Finishes

6841 ● Matt white lacquering (RAL 9016)

6842 ● Matt black lacquering (RAL 9005)

#### HAUL 40 AC CL.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Injected polycarbonate reflector with high vacuum aluminium finish. Base for fixing to wall or ceiling, injected in zamak. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005).

#### HAUL 55 AC CL.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Led "Holder" in polycarbonate injected. Injected polycarbonate reflector, white finishing (MOD. 6861-6862). Base for fixing to wall or ceiling, injected in zamak. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Polycarbonate injected decorative ring. Assembly by pressure. Finishing in white, black and translucent.

## DOWNLOADS

### Catalogue

[Haul](#)

### 3D Files

[6789/6790](#)

[6861/6862](#)

[6841/6842](#)

### 3D Max Files

[6789/6790](#)

[6861/6862](#)

[6841/6842](#)

### Assembly instructions

[6789/6790](#)

[6861/6862](#)

[6841/6842](#)

### Photometric curve

[6789/6790](#)

[6861/6862](#)


[6841/6842](#)

### Economic efficiency index


[6789/6790](#)

[6861/6862](#)



[6841/6842](#)




#### HAUL 40 AC C2F.


$\varnothing 40 \times 85 \text{ mm}$  | H. 123 mm  
 2 x DOB LED 5W   
 500 lumens (x2) | 2.700K  
 | CRI 90  
 3-step MacAdam  
 PF. 0,95  
 Dimmable  
 Class I: Basic insulation

#### Finishes



- 6801  Matt white lacquering (RAL 9016)
- 6802  Matt black lacquering (RAL 9005)



#### HAUL 40 AC C3F.

$\varnothing 40 \times 130 \text{ mm}$  | H. 123 mm  
 2 x DOB LED 5W   
 500 lumens (x3) | 2.700K  
 | CRI 90  
 3-step MacAdam  
 PF. 0,95  
 Dimmable  
 Class I: Basic insulation

#### Finishes

- 6793  Matt white lacquering (RAL 9016)
- 6794  Matt black lacquering (RAL 9005)

## DOWNLOADS

### Catalogue

[Haul](#)

### 3D Files

[6801/6802](#)  
[6793/6794](#)

### 3D Max Files

[6801/6802](#)  
[6793/6794](#)

### Assembly instructions

[6801/6802](#)  
[6793/6794](#)

### Photometric curve

[6801/6802](#)  
[6793/6794](#)

### Economic efficiency index

[6801/6802](#)  
[6793/6794](#)

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Injected polycarbonate reflector with high

vacuum aluminium finish. Base for fixing to wall or ceiling, injected in zamak. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005).