

## Knock



## Milan

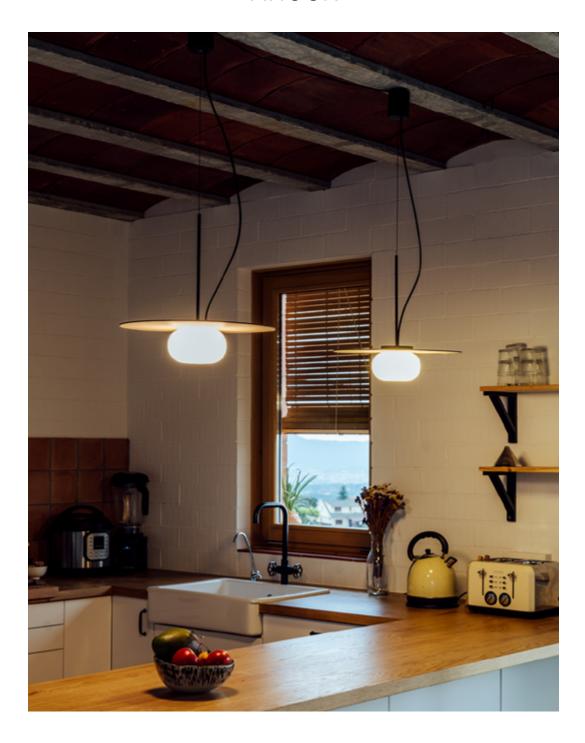



## Knock 40 S. Ø 400 | H. 1300 mm 1 x G9 Bulb retrofit

LED 4,8 W Code 2024 | CRI 80 600 lumens | 2.700 K Not dimmable

LED 3,5 W Code 2990 | CRI 80 350 lumens | 2.700 K Dimmable Class I: Basic insulation

## Finishes

6716 • • Ash wood /
Matt black laquering

**DOWNLOADS** 

Catalogue

Knock

3D Files

6716

3D Max Files

6716

Assembly instructions

6716

Photometric curve

6716

Economic eficiency index

6716

A blend of dynamism and coherence

Satin triplex opal blown glass diffuser shade. 3.5 mm thick ash decorative shade, varnished on the wooden side and black lacquered on the other side of the shade. G9 interior lamp holder in injected polycarbonate. Matt black finish. Screen fixing system, both

decorative and glass diffuser, using a system of three internal springs fixed on the support. Ceiling fixing base and tubes in steel. Matt black lacquer finishes (RAL 9005). Model suspended by black stainless steel cable. Electric black cable through lateral exit.