



WEVER & DUCRÉ
LIGHTING

TRAM WALL 1.0

747568W5

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

White Matt

RAL 9003^a

IP65

Exterior

555 lm

LED

3000 K

CRI \geq 90

3-step binning

OPTICAL

Beam angle 36°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 5.9 W

Class 1

Safety distance 0.3 m



PHYSICAL

Diameter 50 mm


Height 76 mm

0.3 kg


^a Color may deviate slightly due to production conditions.

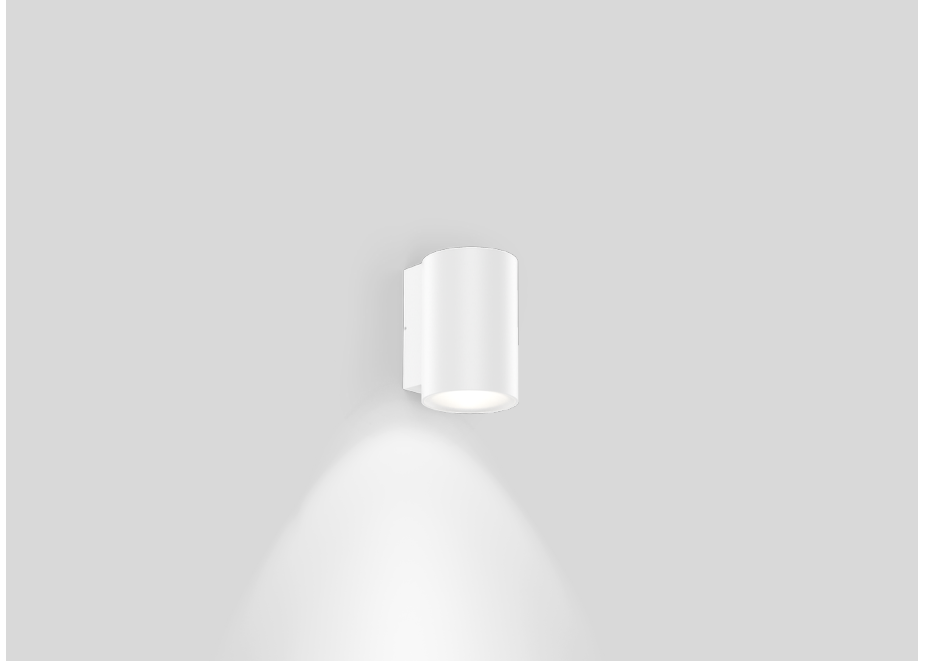

Cylindrical wall surface mounted luminaire made from die-cast aluminium; surface White Matt; powder coated; matt texture; RAL 9003; up or down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; 220 - 240 V; beam angle 36°; degree of protection IP65; PC1; light source not replaceable;



LIGHT DISTRIBUTION



[747568W5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

TRAM WALL 1.0

747568W5