



WEVER & DUCRÉ
LIGHTING

DEEP ADJUST petit 1.0 LED

153661M5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

Tilt min 35°

Tilt max 35°

Rotation 355°

Champagne

IP20

Interior

570 lm

LED

3000 K

2-step binning

OPTICAL

Flood

Beam angle 34°

ELECTRICAL

excl. driver

17 V

LED Inset 7.0 W

350 mA

Class 3

Safety distance 0.3 m

PHYSICAL

Diameter 79 mm

Height 60 mm

0.1 kg

wire springs


CUTOUT

Diameter 68-70 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 23 mm

Recessed depth 65 mm

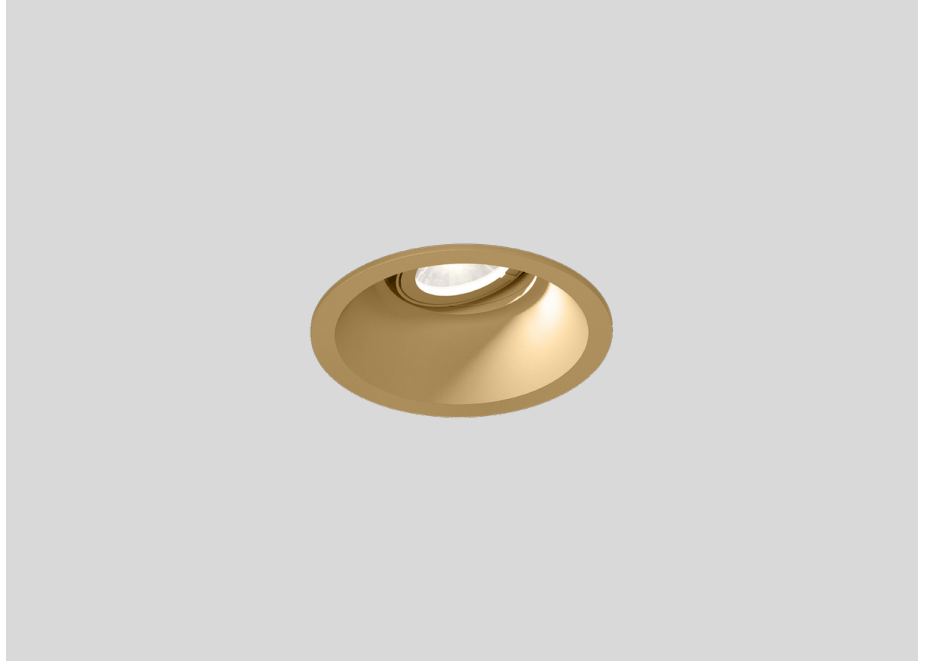

Round ceiling recessed downlight made from die-cast aluminium; adjustable; surface Champagne; wet painted; smooth semi glossy; installation without tools using wire springs; suitable for ceiling thickness of 4-23 mm; recessed depth 65 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; beam angle 34°; 355° rotatable and 35° tiltable; degree of protection IP20; PC3; driver not included; fits into Kaiser ThermoX® 9320-11; light source replaceable by an authorized professional;





WEVER & DUCRÉ
LIGHTING

DEEP ADJUST petit 1.0 LED

153661M5

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 350mA 14-28V	101.5-51-29.5	14 - 28V	9 0 2 2 3 4 0 1
10W 350mA 12-28V	102-38-21	12 - 28V	9 0 2 2 3 4 0 2
17W 350mA 10-49V	108-52-22		9 0 2 4 3 6 0 1