




## Spark Single Ø140mm

Joel Karlson

Ceiling fixture Spark Single Ø140mm LED 10 SW 2700-3000-4000K PHASE CUT Black 424lm

### Technical features

- Luminaire total power: 10W
- Real lumens: 424 (3000K)
- Real lm/W: 42
- Correlated Colour Temperature (CCT): SW 2700-3000-4000K
- Structure material: Steel
- Structure finish: Black
- Diffuser material: Glass
- Diffuser finish: OPAL
- Driver Brand: HEP
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: PHASE CUT
- Power Factor: 0.95
- Useful life: 50,000h L80B20
- Warranty: 5 años
- Easily recyclable luminaire



### Luminotechnic features

- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RGO

| UGR              |            | Lampholder | Quantity | Light source power (W) |
|------------------|------------|------------|----------|------------------------|
| S=0.250          |            |            |          |                        |
| Ceiling / cavity | 0.7        | LED        | 1        | 8.2W                   |
| Walls            | 0.5        |            |          |                        |
| Working Plane    | 0.2        |            |          |                        |
| Room dimensions  | X=4H, Y=8H |            |          |                        |
| UGR crosswise    | 22.9       |            |          |                        |
| UGR lengthwise   | 22.9       |            |          |                        |


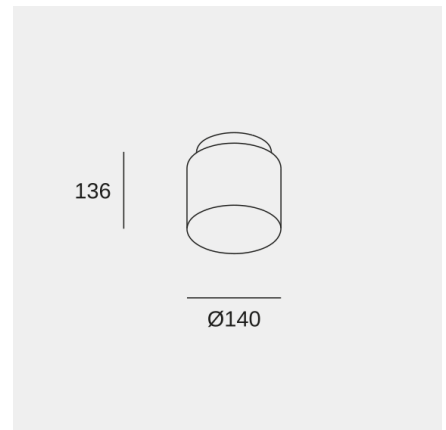


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

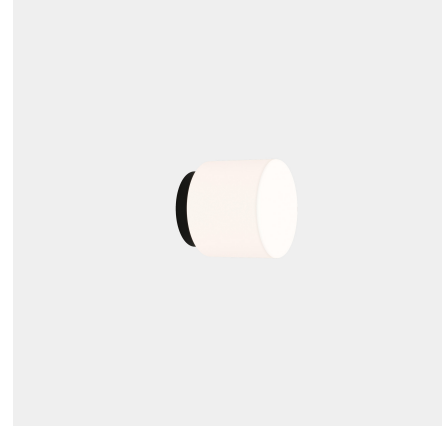

## Spark Single Ø140mm

Joel Karlson

Ceiling fixture Spark Single Ø140mm LED 10 SW 2700-3000-4000K PHASE CUT Black 424lm

### Logistics



x 12

Net weight (kg): 0.68

Packaged weight (kg): 1.06

Packaging: 200mm x 195mm x  
225mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.